


The perfect basis for your ideas: our comprehensive range of sheets.

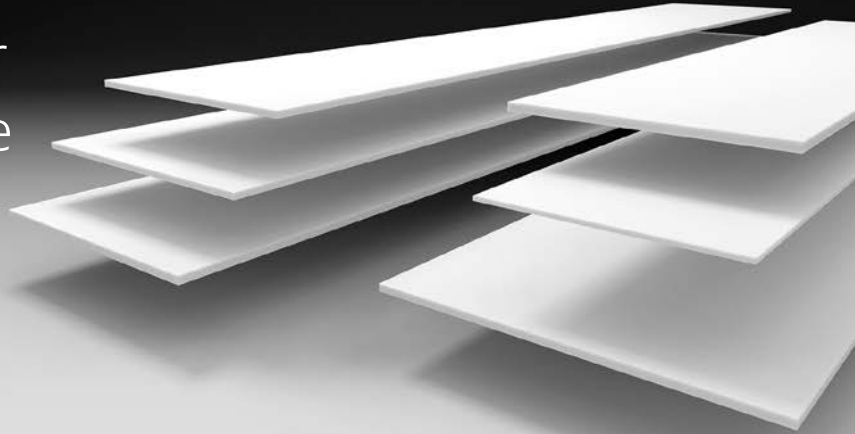

Sheet Material

- HIMACS is available in different thicknesses, formats and sizes. Perfect for maximum cutting and minimal costs. However, not all colours are available in every thickness. See the table for availability below.
- HIMACS sheet material is available in thicknesses of 4.5 mm, 6 mm, 9 mm, 12 mm and 20 mm as well as the corresponding sheet formats.

HIMACS is also available in special formulations:

- **HIMACS Exteria®:** HIMACS FR – Low flammability, ETA Certified, IMO Certified, Norm EN 45 545 Class R1 HZL3 for fire protection on railway vehicles. HIMACS UV+ – Advanced UV resistance, CSTB Certified.
- **HIMACS Ultra-Thermoforming:** Advanced Thermoforming, up to 6 mm internal radius.
- **HIMACS Intense-Ultra:** The best of two worlds – Ultra-Thermoforming and Intense Colour Tecnology

For more information, see page 69.

Dimensions – Sheet material

Standard Format

Standard formats are available on stock, for specific thicknesses per colour, please refer to the colour chart on page 66, or contact your sales representative.

| SHEET THICKNESS IN MM | SHEET WIDTH IN MM | SHEET LENGTH IN MM |
|-----------------------|-------------------|--------------------|
| 4.5 | 930 | 3000 * |
| | 760 | 2490 |
| 6 | 910 | 2490 * |
| | 1350 | 3680 * |
| | 760 | 3680 |
| 9 | 910 | 3680 * |
| | 1350 | 3680 * |
| | 760 | 3680 |
| 12 | 910 | 3680 * |
| | 1350 | 3000 *** |
| | 1350 | 3680 * |
| | 1520 | 3680 * |
| 20 | 760 | 3000 |

Ultra-Thermoforming Format

| SHEET THICKNESS IN MM | SHEET WIDTH IN MM | SHEET LENGTH IN MM |
|-----------------------|-------------------|--------------------|
| 12 | 760 | 3680 ** |
| | 930 | |
| | 1520 | |

* Only available in S028 Alpine White.

** Only available in S928 Alpine White.

*** Only available in Opal

Standard Formats

760 x 2490 mm

910 x 2490 mm

760 x 3000 mm

1350 x 3000 mm

760 x 3680 mm

910 x 3680 mm

930 x 3680 mm

1350 x 3680 mm

1520 x 3680 mm